

CITY OF RAYMORE

100 Municipal Circle · Raymore, MO. 64083
Phone · 816-892-3045 · Fax · 816-892-3093



ADDENDUM NO. 1

Willowind Gravity Sewer
Project #20-345-201

All plan holders are hereby notified and agree by signature below, that the proposal includes consideration of the following changes, amendments, and/or clarifications and costs associated with these changes and are included in the proposal.

Addendum No. 1 - Clarification and questions.

1. The City has no data on the amount of sewage currently flowing into the wet well.
2. The City has no information on the subsurface conditions below 58 Highway. The bore should be considered unclassified.
3. The carrier pipe in the bore shall be either restrained SDR 26 or Restrained C900 PVC.
4. The casing detail is attached. External joint restraints are not required and the casing pipe is to be C905 PVC.
5. What is the restoration requirement? Seed and Straw? What is the restoration requirement on the North side of 58 Highway?

Response: Restoration is by seed and straw on both sides of 58. Seeding rate is specified in item Q of the Measurement and Payment section of the RFP.

6. How thick is the Rip Rap ? You guys have it listed as 100 SY.

Response: Rip rap should be at least one foot thick

7. What happens with the Manhole and pipe to the south of the vault ? Is it removed ?

Response: The manhole to the south of the vault should be buried below grade and the pipe plugged with grout or concrete.

8. Has the City filled out the paper work for the SWPPP and do you have the permit ?

Response: The SWPPP and permit are the contractor's responsibility. See the fourth item on the bid tab and item D of the Measurement and Payment section of the RFP.

9. I checked with my supplier and there is no SDR 26 Restrained pipe, do you have an alternate pipe you are going to spec.

Response: There is SDR 26 restrained pipe available (Certa-Flo). However, as per this addendum, C900 restrained pipe is also acceptable.

Attendees at Pre-Bids:

Blue Nile Contractors
Breit Construction
Redford Construction
Kissick Construction

Westland Construction
Leath and Sons
Pyramid Excavation
Tasco LLC

J & N Utilities, Inc
Adex Construction
J.A. Lillig Excavating

Any other questions regarding this proposal shall be submitted to Kim Quade, CPPB by email at kquade@raymore.com or by phone at (816) 892-3045. There will be no questions allowed after July 13, 2020 at 5 p.m.

I hereby certify that the above have been considered and associated costs have been included in this bid.

Company Name: _____

By: _____

Title: _____


Address: _____

City, State, Zip: _____

Date: _____ Phone: _____



Signature of Bidder: _____

ADDENDUM MUST BE SUBMITTED WITH BID

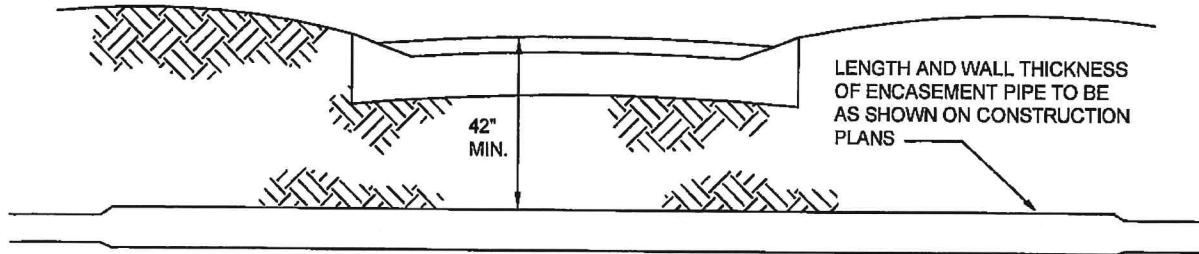

Notes:

1. Engineer to determine required casing pipe thickness.
2. Polywrap required if the casing pipe is ductile iron.

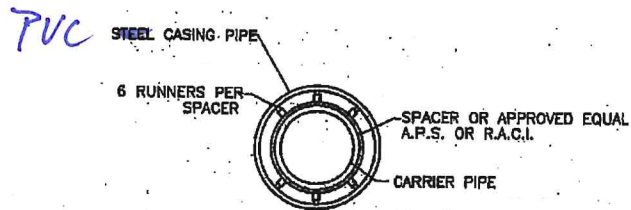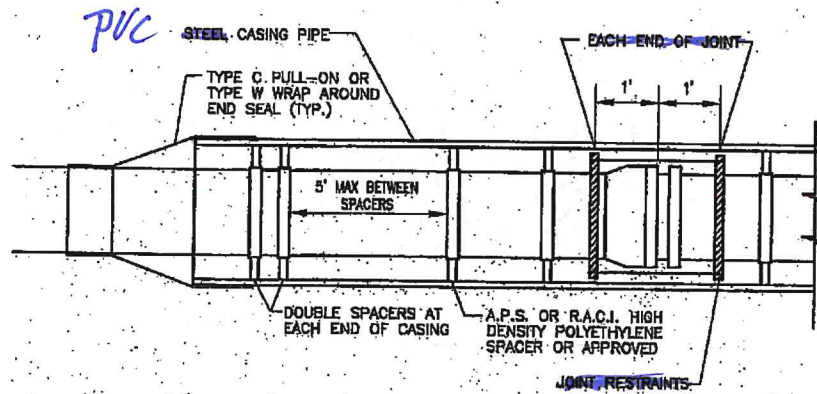

SECTION VIEW

Engineering Department City of Raymore 100 Municipal Circle Raymore, MO 64083 816-331-1852 Fax 816-331-8067		<h1>City of Raymore</h1>			
		<h2>Pipe Encasement Under Road</h2>			
DRAWN Modified 2013	DATE	SIZE A	FSCM NO.	DWG NO. St - 13	REV
CHECKED		SCALE NONE		SHEET 1 OF 1	
APPROVED					