CITY OF RAYMORE 100 Municipal Circle · Raymore, MO. 64083 Phone · 816-892-3045 · Fax · 816-892-3093



ADDENDUM NO. 1

Parks Trail Replacement Project #24-449-201

All plan holders are hereby notified and agree by signature below, that the proposal includes consideration of the following changes, amendments, and/or clarifications and costs associated with these changes and are included in the proposal.

Addendum No. 1 - Clarification, Addition and Revised Proposal Form.

1. Addition: Add (19) Vestil Steel Underground Removable Ornamental Bollard 40 in. Black BOL-OR-40-BK. Location Maps and Updated Bid Proposal Form E. Attached. The bollard shall be installed in concrete according to manufacturer recommendations.

2. Question: Is there a self-perform requirement that the prime contractor has to meet or can a general contractor with no self-perform capabilities bid the project?

Response: no

3. Question: Please confirm the thickness of the existing asphalt for both Parks

Response: It is believed that the REC Park Trails is +/-5'' Asphalt and the Memorial Park Trail is <4'', however, because the trails were installed at various times over the last 40 years, it is impossible for us to verify this is the case for all sections of trail. The city would encourage potential bidders to take their own cores. If this option is chosen The City should be notified of when this work will take place.

4. Question: If there is excess dirt can we leave it on site if we blend it in or does that have to be hauled off.

Response: no. All spoils must be disposed of offsite by the contractor.

5. Question: The pay descriptions for the <u>6" thick trail</u> & <u>4" thick sidewalk</u> mention "placement of AB-3 subgrade" but I'm unable to find how thick the rock base needs to be for each. Can you please point me in the right direction?

Response: The AB-3 leveling course does not have a specific thickness. There is no base rock requirement, but if the cross slope of the trail is not 2% or less, compacted AB-3 is to be used to correct the grades.

6. Question: During the site walk the Surveying pay items had some questions about what the intent of this pay item was intended for as far as the utilization of a licensed surveyor and to what extent we would be required to "establish controls" or if it is simply agreement of line/grade between contractor and city.

Response:The surveying line item is to compensate the contractor for ensuring that the proposed construction doesn't pond or prevent water from draining and for time spent laying out the new Memorial Park Trail. Any grading or fill required to ensure this at a minimum of 2% is subsidiary to the trail construction/restoration. A licensed surveyor or as-builts are not required. Areas with standing water will not be accepted.

Any other questions regarding this proposal shall be submitted to Kim Quade, CPPB by email at kquade@raymore.com or by phone at (816) 892-3045. There will be no questions allowed after February 16, 2024 at 12:00 p.m.

I hereby certify that the above have been considered and associated costs have been included in this bid.

Company Name:	
By:	
Title:	
City, State, Zip:	
Date:	Phone:
Signature of Bidde	er:

ADDENDUM MUST BE SUBMITTED WITH BID

REVISED BID PROPOSAL FORM E – Project No. 24-449-201

Park Trails Replacement Base Bid

Memorial Park

Base Bid Items	Units	Estimated Quantities	\$/Units	Total
Mobilization, Bonds and Insurance - not to exceed 5%	LS	1	\$	\$
Surveying	LS	1	\$	\$
Existing Sidewalk / Trail Removal	SY	2056	\$	\$
6" thick, 10' Wide Concrete Trail	LF	3250	\$	\$
4" Thick, 5' wide sidewalk	LF	100	\$	\$
Construction Entrances	Each	2	\$	\$
Site Restoration (Seed & Mulch)	LS	1	\$	\$
SWPPP and Land Disturbance Permit	LS	1	\$	\$
Vestil Steel Underground Removable Ornamental Bollard 40 in. Black	Each	5	\$	\$
Total Memorial Park Bid				\$

Recreation Park

Base Bid Items	Units	Estimated Quantities	\$/Units	Total
Mobilization, Bonds and Insurance - not to exceed 5%	LS	1	\$	\$
Surveying	LS	1	\$	\$
Existing Sidewalk / Trail Removal	Sq Yds	7083	\$	\$
6" thick, 10' Wide Concrete Trail	LF	8000	\$	\$
4" Thick, 5' wide sidewalk	LF	100	\$	\$
Construction Entrances	Each	2	\$	\$
Site Restoration (Seed & Mulch)	LS	1	\$	\$
SWPPP and Land Disturbance Permit	LS	1	\$	\$
Vestil Steel Underground Removable Ornamental Bollard 40 in. Black	Each	14	\$	\$
Total Recreation Park Bid				\$

Company Name _____

Total Base Bid <u>Both</u> Parks for Project Number: 24-449-201


(\$_____)

In the blank above write out the sum of the bid.

REVISED BID PROPOSAL FORM E - RFP 24-449-201 CONTINUED

Company Name	
Ву	ADDENDA Bidder acknowledges receipt of the
Authorized Person's Signature	following addendum:
	Addendum No
Print or type name and title of signer	Addendum No
Company Address	Addendum No
	Addendum No
	Addendum No
Phone	Addendum No
Fax	
Email	
Date	

LATE BIDS CANNOT BE ACCEPTED!

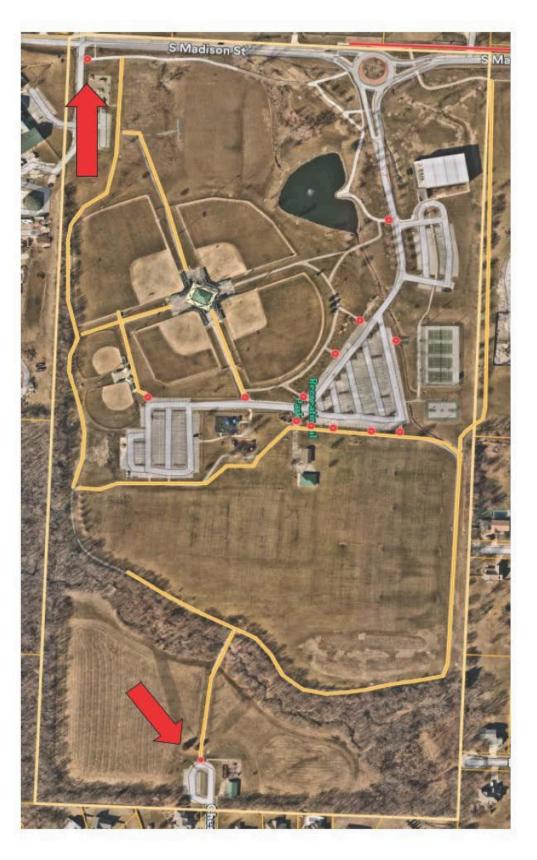

Recreation Park / Moon Valley - 14



Memorial Park - 5



Vestil Steel Underground Removable Ornamental Bollard 40 In. Black BOL-OR-40-BK

24-449-201 Addendum 1 Page: 8